

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 November 2004 (25.11.2004)

PCT

(10) International Publication Number
WO 2004/101144 A1

(51) International Patent Classification⁷: **B01J 23/50**,
23/58, 23/63, 23/656, 23/68, 35/02, 35/10, C07D 301/00,
B01J 37/02

(21) International Application Number:
PCT/US2004/014088

(22) International Filing Date: 5 May 2004 (05.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/431,189 7 May 2003 (07.05.2003) US
10/816,543 1 April 2004 (01.04.2004) US

(71) Applicant (for all designated States except US): **SHELL OIL COMPANY** [US/US]; One Shell Plaza, P.O. Box 2463, Houston, TX 77252-2463 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MATUSZ, Marek** [US/US]; 14515 Meeting Lane, Houston, TX 77084 (US). **RICHARD, Michael, Alan** [US/US]; 4919 Waterdale Drive, Fulsher, TX 77441 (US). **LOCKEMEYER, John, Robert** [US/US]; 3403 Stoney Mist Drive, Sugar Land, TX

77479 (US). **BOS, Alouisius, Nicolaa, Renee** [NL/NL]; Badhuisweg 3, 1031 Amsterdam, Netherlands (NL). **REKERS, Dominicus, Maria** [NL/NL]; Badhuisweg 3, 1031 Amsterdam, Netherlands (NL). **REINALDA, Donald** [NL/NL]; Badhuisweg 3, 1031 Amsterdam (NL). **YEATES, Randall, Clayton** [NL/US]; 16310 Maple Downs Lane, Sugar Land, TX 77478 (US).


(74) Agent: **LEMUTH, Richard, F.**; Shell Oil Company, One Shell Plaza, P.O. Box 2463, Houston, TX 77252-2463 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: **SILVER-CONTAINING CATALYSTS, THE MANUFACTURE OF SUCH SILVER CONTAINING CATALYSTS, AND THE USE THEREOF**

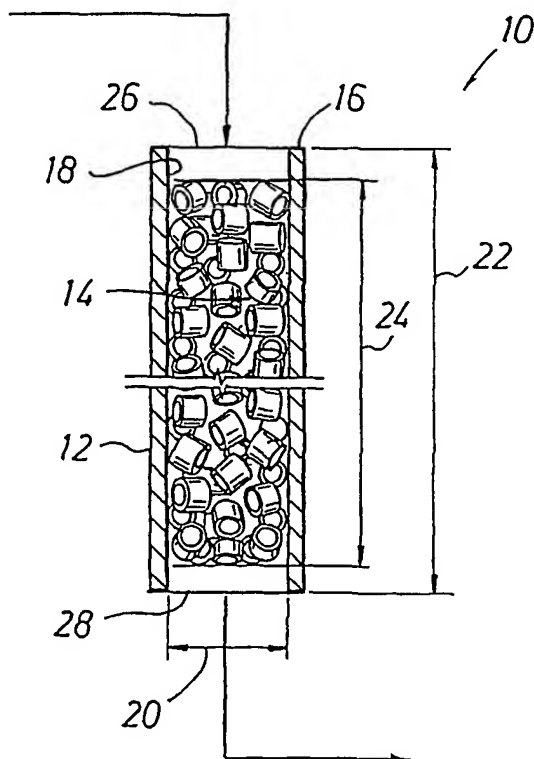

(57) Abstract: A high activity and high selectivity silver catalyst comprising silver and, optionally, one or more promoters supported on a suitable support material having the form of a shaped agglomerate. The structure of the shaped agglomerate is that of a hollow cylinder having a relatively small inside (bore) diameter. The catalyst is made by providing the shaped material of a particular geometry and incorporating the catalytic components therein. The catalyst is useful in the epoxidation of ethylene.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SILVER-CONTAINING CATALYSTS, THE MANUFACTURE OF SUCH SILVER-
CONTAINING CATALYSTS, AND THE USE THEREOF

5 This invention relates to silver-containing catalyst compositions that are particularly suitable for use in the manufacture of ethylene oxide.

 Ethylene oxide is an important industrial chemical used as a feedstock for making such chemicals as ethylene glycol, ethylene glycol ethers, alkanol amines and detergents. One
10 method of manufacturing ethylene oxide is by the catalyzed partial oxidation of ethylene with oxygen. There are continuing efforts to develop catalysts that can improve the operating efficiency of such ethylene oxide manufacturing
15 processes. Some of the desirable properties of an ethylene oxide catalyst include good selectivity, good activity, and long catalyst life.

 It is, thus, an object of this invention to provide a catalyst that has certain desirable catalytic properties that
20 make it particularly suitable for use in the manufacture of ethylene oxide.

 It is another object of this invention to provide a method of making a catalyst that exhibits at least some of the aforementioned desirable catalytic properties.

25 Yet another object of this invention is to provide an economically efficient process for manufacturing ethylene oxide by utilizing a catalyst having certain desirable catalytic properties.

 Other aspects, objects and the several advantages of the
30 invention will become more apparent in light of the following disclosure.

 According to one aspect of the invention, a catalyst is provided which comprises silver deposited on a shaped support material having a hollow cylinder geometric configuration

such that the length-to-outside diameter ratio of said shaped support material is in the range of from 0.3 to 2 and the internal diameter is in the range upwardly to 30 percent of the outside diameter of said shaped support material.

5 Suitably, the catalyst has a high silver concentration and at least one promoter compound, and the silver and promoter compound are preferably supported on a support material having a high water pore volume.

According to another aspect of the invention, a method
10 is provided for making the catalyst of this invention. Suitably, the method involves providing a shaped support material and impregnating the shaped support material with a silver-containing solution such that the amount of silver metal in the shaped support material exceeds 15 weight
15 percent of the weight of the shaped support material, in particular exceeds 15 weight percent of the weight of the catalyst. The silver impregnated shaped support material is then heat treated to provide the catalyst, for example in a temperature range of from 100 to 500 °C, preferably from 150
20 to 300 °C.

According to yet another aspect of the invention, a packed catalyst bed is provided which is formed from catalyst particles comprising silver supported on a shaped support, which catalyst bed has a silver loading of at least 150 kg
25 silver/m³ catalyst bed.

According to yet another aspect of the invention, the above described catalyst, a catalyst made by the above-described method, or the above described catalyst bed is used in a process for manufacturing ethylene oxide by contacting
30 the catalyst, under suitable epoxidation process conditions, with a feed stream that comprises ethylene and oxygen.

Further, the invention provides a method of using ethylene oxide for making ethylene glycol, an ethylene glycol

ether or an 1,2-alkanolamine comprising converting ethylene oxide into ethylene glycol, the ethylene glycol ether, or the 1,2-alkanolamine, wherein the ethylene oxide has been obtained by the process for preparing ethylene oxide
5 according to this invention.

FIG. 1 depicts certain aspects of a reactor tube that includes a packed catalyst bed comprising the catalyst of this invention;

FIG. 2 depicts the shaped support for use in the
10 invention and which has a hollow cylinder geometric configuration and the physical dimensions that characterize the shaped support material; and

FIG. 3 depicts drawings of the cross-sections of the outside perimeters of (a) the shaped support material being
15 an ideal cylinder, and (b) a cross-section of the shaped support material being a deviation from an ideal cylinder.

The catalyst composition of the present invention is a novel combination of catalytic components and support material. The support material has specific physical
20 properties and is preferably formed into a shaped agglomerate of the support material having a hollow cylinder geometric configuration or structure with a relatively small internal diameter. "Relatively small" is herein to be understood as meaning smaller than conventionally applied in such
25 catalysts. Also, as used herein, the terms "carrier" and "support" have the same meaning and have been used herein interchangeably.

An important aspect of this invention is the recognition that a substantial improvement can be obtained in catalyst
30 performance, which includes the initial performance in activity and selectivity and also the activity stability and selectivity stability, for example, by changing the ratio of the nominal outside diameter to the nominal inside diameter

of the hollow cylinder geometric configuration. This is truly unexpected because catalysts based on hollow cylinder support materials have been employed in processes for the manufacture of ethylene oxide already for many years and much effort has been devoted to improving the performance of such catalyst. However, attempts to improve the performance of these catalysts by modifying the geometry of the hollow cylinder geometric configuration do not seem to have received attention.

10 The support material of the catalyst composition can be any porous refractory material that is relatively inert in the presence of ethylene oxidation feeds, products and reaction conditions; provided, such support material has the physical properties desired for the inventive catalyst composition especially when used to support the catalytic components of the inventive composition. Generally, the support material comprises an inorganic material, in particular an oxide, which can include, for example, alumina, silicon carbide, carbon, silica, zirconia, magnesia, silica-
15 alumina, silica-magnesia, silica-titania, alumina-titania, alumina-magnesia, alumina-zirconia, thoria, silica-titania-zirconia and various clays.

20 The preferred support material comprises alumina preferably of a high purity of at least 90 weight percent alumina and, more preferably, at least 98 weight percent alumina. Frequently, the support material comprises at most 99.9 weight percent, more frequently at most 99.5 weight percent alumina. Among the various available forms of alumina alpha-alumina is the most preferred.

30 A particular aspect of the inventive catalyst composition is for the support material to have typically a high water absorption value generally exceeding 40%. This high water absorption value allows for the loading of a

greater amount of silver onto the support material than can be loaded onto other inorganic materials that have a lower value for water absorption. It has, thus, been found that for the inventive catalyst composition it is preferred for the water absorption of the support material to be greater than 42.5%, more preferably, greater than 45% and, most preferably, greater than 46%. Frequently, the water absorption is at most 80%, more frequently at most 70%.

As used herein, the term "water absorption" means the value as determined by test procedure ASTM C20, which is incorporated herein by reference. Water absorption is, expressed as a percentage, the weight of the water that can be absorbed into the pores of the carrier, relative to the weight of the carrier.

Typically, the support material has a mean pore diameter of 0.3 to 15 μ m, preferably 1 to 10 μ m; and typically a percentage of pores having a diameter of 0.03 to 10 μ m of at least 50% by weight, as determined by mercury intrusion to a pressure of 3.0×10^8 Pa using a Micromeretics Autopore 9200 model (130° contact angle, mercury with a surface tension of 0.473 N/m, and correction for mercury compression applied).

The surface area of the support material as measured by the B.E.T. method can be in the range of from 0.03 m²/g to 10 m²/g, preferably from 0.05 m²/g to 5 m²/g and most preferably from 0.1 m²/g to 3 m²/g. Suitably, the surface area is at least 0.5 m²/g. The B.E.T. method of measuring surface area has been described in detail by Brunauer, Emmet and Teller in *J. Am. Chem. Soc.* 60 (1938) 309-316, which is incorporated herein by reference.

An aspect of the inventive catalyst composition is for the support material to be in the form of a shaped agglomerate, and for the shaped agglomerate of support

material to have a hollow cylinder geometric configuration with an inner diameter ("bore diameter", hereinafter), that is relatively small.

Reference is now made to FIG. 1 which depicts a reactor system 10 comprising an elongated reactor tube 12 and a packed catalyst bed 14 contained within elongated tube 12. Elongated tube 12 has a tube wall 16 with an inside tube surface 18 and inside tube diameter 20 that define a reaction zone, wherein is contained packed catalyst bed 14, and a reaction zone diameter 20. Elongated tube 12 has a tube length 22 and the packed catalyst bed 14 contained within the reaction zone has a bed depth 24. Outside the bed depth 24, the elongated tube 12 may contain a separate bed of particles of a non-catalytic material for the purpose of, for example, heat exchange with a feedstock and/or another such separate bed for the purpose of, for example, heat exchange with a reaction product. The elongated tube 12 further has an inlet tube end 26 into which the feed stream comprising ethylene and oxygen can be introduced and an outlet tube end 28 from which a reaction product comprising ethylene oxide and ethylene can be withdrawn.

The packed catalyst bed 14 contained within the reaction zone is composed of a bed of supported catalyst 30 as depicted in FIG. 2. The supported catalyst 30 is based on the support material having a generally hollow cylinder geometric configuration with a length 32, outside diameter 34, and inside or bore diameter 36.

The skilled person will appreciate that the expression "cylinder" does not necessarily mean that the hollow cylinder geometric configuration comprises an exact cylinder. The expression "cylinder" is meant to include insignificant deviations from an exact cylinder. For example, the cross-section of the outer perimeter of the hollow cylinder

geometric configuration perpendicular to the cylinder axis is not necessarily an exact circle 71, as depicted in FIG. 3. Also, the axis of the hollow cylinder geometric configuration may be approximately straight and/or the outside diameter of the hollow cylinder geometric configuration may be approximately constant along the axis. Thus, insignificant deviations include, for example, cases where the outside perimeter of the cylinder can be positioned in an imaginary tube-shaped space defined by two imaginary exact coaxial cylinders of virtually the same diameters, whereby the diameter of the imaginary inner cylinder is at least 70%, more typically at least 80%, in particular at least 90%, of the diameter of the imaginary outer cylinder, and the imaginary cylinders are chosen such that the ratio of their diameters is the closest possible to 1. In such cases the diameter of the imaginary outer cylinder is deemed to be the outer diameter of the hollow cylinder geometric configuration. FIG. 3 depicts in a cross-sectional view, taken perpendicular to the axis of the imaginary cylinders 73 and 74, the outside perimeter 72 of the hollow cylinder geometric configuration, the imaginary outer cylinder 73 and the imaginary inner cylinder 74.

Similarly, the skilled person will appreciate that the bore of the hollow cylinder geometric configuration may not be necessarily exactly cylindrical, the axis of the bore may be approximately straight, the bore diameter may be approximately constant, and/or the axis of the bore may be displaced, or may angle, relative to the axis of the cylinder. If the bore diameter changes over the length of the bore, the bore diameter is deemed to be the largest diameter at a bore end. Also, the void space provided by the bore may be divided over more than one bore, for example 2, 3, or even 4, or 5 bores, in which case the diameters of the

bores are such that the total of the cross-sectional areas of the bores is equal to the cross-sectional area of a single bore having a diameter, as specified herein.

In preferred embodiments, the hollow cylinder geometric
5 configuration is intended to be a cylinder having a bore at the axis of the cylinder.

The smaller, than conventional, bore diameter helps provide for an improvement in the average crush strength of the agglomerate by offsetting the loss in crush strength that
10 results from using a support material having a greater porosity (i.e. water absorption). Another benefit from the smaller bore diameter is that it provides for packing a greater amount of support material into the same volume, i.e., packing density, thus, allowing for more silver to be
15 loaded into the same volume.

While it is an important aspect of the invention for the bore diameter of the shaped agglomerate to be relatively small, it is also important for the inside bore of the shaped agglomerate to have at least some dimension. It is preferred
20 to have at at least one end of the bore, preferably at both ends, a bore diameter of at least 0.1 mm, more preferably at least 0.2 mm. Preferably the bore diameter is at least 0.5 mm, and preferably up to 2 mm, for example 1 mm or 1.5 mm.

25 It has been found that the void space defined by the bore diameter provides for certain benefits in the manufacturing of the inventive catalyst and its catalytic properties. While not wanting to be bound to any particular theory, it is believed, however, that the void space provided
30 by the bore diameter of the hollow cylinder allows for improved carrier impregnation and catalyst drying. The catalytic benefits associated with the inventive catalyst is demonstrated and discussed in more detail elsewhere herein.

The hollow cylinder geometric configuration can be defined by an outside diameter, a bore diameter, and a length. It is understood that these dimensions are nominal and approximate, since, methods of manufacturing the shaped agglomerates are not necessarily precise. The hollow cylinder may typically have a length-to-outside diameter ratio in the range of from 0.3 to 2, preferably from 0.5 to 1.6 and, most preferably, from 0.9 to 1.1. An important, if not critical feature of the invention is for the bore diameter to be relatively small. For instance, the ratio of bore diameter to outside diameter can range upwardly to 0.3, preferably, from 0.01 to 0.25 and, most preferably, from 0.02 to 0.2.

Typically, the outside diameter of the hollow cylinder is in the range of from 4 to 16 mm, more typically from 5 to 12 mm, for example 8 mm. In another embodiment, the outside diameter of the hollow cylinder is typically in the range of from 4 to 12 mm, more typically from 5 to 10 mm, for example 8 mm. Typically, the bore diameter is smaller than 3.5 mm, more typically in the range of from 0.01 to 3 mm, for example in the range of from 0.1 mm to 2.5 mm, more typically from 0.2 mm to 2 mm, for example 1 mm or 1.5 mm.

In addition to the support material that is formed into an agglomerate having a specific geometric configuration, incorporated into the support material is at least a catalytically effective amount of silver and, optionally, one or more promoters and, optionally, one or more copromoters. Thus, the inventive catalyst comprises a shaped support material, a catalytically effective amount of silver and, optionally, one or more promoters and, optionally, one or more copromoters.

Another particular aspect of the inventive catalyst is for the support to be typically highly loaded with silver.

The combination of using a high porosity support material having the shaped configuration, in combination, helps provide for a high silver loading. The silver loading is generally such that the amount of silver in the catalyst composition exceeds 15 weight percent based on the total weight of the catalyst or even exceeding 16 weight percent. Preferably, however, the silver content of the catalysts exceeds 17 weight percent and, more preferably 18 weight percent, and most preferably 20 weight percent. Typically, the amount of silver is at most 50 weight percent, more typically at most 45 weight percent, in particular at most 40 weight percent, based on the total weight of the catalyst.

In general, the catalyst of the present invention is prepared by impregnating the shaped agglomerate of support material with silver and, optionally, one or more promoters, such as, for example, rare earth metals, magnesium, rhenium and alkali metals (lithium, sodium, potassium, rubidium and cesium), or compounds thereof, and, optionally, one or more copromoters, such as, for example, sulfur, molybdenum, tungsten and chromium, or compounds thereof. Among the promoter components that can be incorporated into the shaped agglomerate of support material, rhenium and the alkali metals, in particular, the higher alkali metals, such as potassium, rubidium and cesium, are preferred. Most preferred among the higher alkali metals is cesium, which may be used alone or in a mixture together with for example potassium and/or lithium. Either the rhenium promoter may be used without an alkali metal promoter being present or an alkali metal promoter may be used without a rhenium promoter being present or a rhenium promoter and an alkali metal promoter can both be present in the catalyst system. The copromoters for use in combination with rhenium can include sulfur, molybdenum, tungsten, and chromium.

Silver is incorporated into the shaped agglomerate of support material by contacting it with a silver solution formed by dissolving a silver salt, or silver compound, or silver complex in a suitable solvent. The contacting or
5 impregnation is preferably done in a single impregnation step whereby the silver is deposited onto the shaped agglomerate so as to provide, for instance, at least 15 weight percent silver, based on the total weight of the catalyst. In
10 another preferred embodiment, wherein a substantially higher amount of silver is deposited onto the shaped agglomerate, for instance, at least 20 weight percent silver, based on the total weight of the catalyst, silver may be deposited in more than one impregnation step, for example in two, three or four impregnation steps, preferably two impregnation steps.

15 The one or more promoters can also be deposited on the shaped agglomerate either prior to, coincidentally with, or subsequent to the deposition of the silver, but, preferably, the one or more promoters are deposited on the shaped agglomerate coincidentally or simultaneously with the silver.
20 When the catalyst comprises silver, rhenium and a copromoter for rhenium, it may be advantageous to deposit the copromoter prior to or simultaneous with the deposition of silver, and to deposit rhenium after at least a portion of the silver has been deposited. The advantage is this sequence of deposition
25 steps materializes in an enhanced stability of the catalyst in particular in respect of its activity.

Promoting amounts of alkali metal or mixtures of alkali metal can be deposited on a shaped agglomerate support using a suitable solution. Although alkali metals exist in a pure
30 metallic state, they are not suitable for use in that form. They are generally used as compounds of the alkali metals dissolved in a suitable solvent for impregnation purposes. The shaped agglomerate may be impregnated with a solution of

the alkali metal compound(s) before, during or after impregnation of the silver in a suitable form has taken place. An alkali metal promoter may even be deposited on the shaped agglomerate after the silver component has been
5 reduced to metallic silver.

The promoting amount of alkali metal utilized will depend on several variables, such as, for example, the surface area and pore structure and surface chemical properties of the carrier used, the silver content of the
10 catalyst and the particular ions and their amounts used in conjunction with the alkali metal cation.

The amount of alkali metal promoter deposited upon the shaped agglomerate or present on the catalyst is generally in the range of from 10 parts per million to 3000 parts per
15 million, preferably between 15 parts per million and 2000 parts per million and more preferably, between 20 parts per million and 1500 parts per million, by weight of the metal relative to the weight of total catalyst.

The shaped agglomerate can also be impregnated with
20 rhenium ions, salt(s), compound(s), and/or complex(es). This may be done at the same time that the alkali metal promoter is added, or before or later; or at the same time that the silver is added, or before or later. Rhenium, alkali metal, and silver may be in the same impregnation solution. Their
25 presence in different solutions will provide suitable catalysts, and in some instances even improved catalysts.

The preferred amount of rhenium, calculated as the metal, deposited on or present on the shaped agglomerate or catalyst ranges from 0.1 micromoles (μmole) per gram to 10
30 micromoles per gram, more preferably from 0.2 micromoles per gram to 5 micromoles per gram of total catalyst, or, alternatively stated, from 19 parts per million to 1860 parts per million, preferably from 37 parts per million to 930

parts per million by weight of total catalyst. The references to the amount of rhenium present on the catalyst are expressed as the metal, irrespective of the form in which the rhenium is actually present.

5 The rhenium compound used in the preparation of the instant catalyst includes rhenium compounds that can be solubilized in an appropriate solvent. Preferably, the solvent is a water-containing solvent. More preferably, the solvent is the same solvent used to deposit the silver and
10 the alkali metal promoter.

 Examples of suitable rhenium compounds used in making the inventive catalyst include the rhenium salts such as rhenium halides, the rhenium oxyhalides, the rhenates, the perrhenates, the oxides and the acids of rhenium. A
15 preferred compound for use in the impregnation solution is the perrhenate, preferably ammonium perrhenate. However, the alkali metal perrhenates, alkaline earth metal perrhenates, silver perrhenates, other perrhenates and rhenium heptoxide can also be suitably utilized.

20 The one or more copromoters can be deposited on the shaped agglomerate by any suitable manner known to those skilled in the art. The copromoter is deposited on the shaped agglomerate either prior to, coincidentally with, or subsequent to the deposition of the silver, but preferably,
25 the one or more copromoters are deposited on the shaped agglomerate coincidentally or simultaneously with the silver. A copromoting amount of copromoter is deposited on the shaped agglomerate and can generally be in the range of from 0.01 to 25, or more, μ moles per gram of total catalyst.

30 The catalysts according to the present invention have a particularly high activity and high selectivity for ethylene oxide production in the direct oxidation of ethylene with molecular oxygen to ethylene oxide. For instance, the

inventive catalyst can have an initial selectivity of at least 86.5 mole percent, preferably, at least 87 mole percent and, most preferably, at least 88.5 mole percent. It is a benefit of this invention that when packing the inventive catalyst into a catalyst bed it provides a catalyst bed having a relatively high silver loading, without causing an increased pressure drop over the catalyst bed when in use in the process for manufacturing ethylene oxide, and/or having an improved balance of packing density relative to such pressure drop. When decreasing the bore diameter, the balance of pressure drop/packing density behaves favorably in a typical reactor tube used in the manufacture of ethylene oxide, compared with predictions on the basis of theoretical models, for example the Ergun Correlation, see W.J. Beek and K.M.K. Muttzall, "Transport Phenomena", J. Wiley and Sons Ltd, 1975, p. 114. By practicing the present invention, it is achievable that the silver loading of the catalyst may be at least 150 kg silver/m³ catalyst bed, preferably at least 170 kg silver/m³ catalyst bed, more preferably at least 200 kg silver/m³ catalyst bed, and in particular at least 250 kg silver/m³ catalyst bed. Frequently, the silver loading is at most 800 kg silver/m³ catalyst bed, more frequently at most 600 kg silver/m³ catalyst bed, still more frequently at most 550 kg silver/m³ catalyst bed. The high silver loading permits the application of relatively mild conditions in the process for manufacturing ethylene oxide, in particular temperature, for the achievement of a given work rate, along with the achievement of an improved selectivity and catalyst life, in particular in terms of activity stability and selectivity stability.

As it is used herein with reference to the selectivity of a catalyst, the term "selectivity", S_w , means the mole percent (%) of the desired ethylene oxide formed relative to

the total of ethylene converted. The selectivity may be specified at a given work rate, w , for a catalyst with the work rate being defined as the amount of ethylene oxide produced per unit volume of catalyst (e.g., kg per m³) per hour. As it is used herein with reference to the activity of a catalyst, the term "activity", T_w , means the temperature needed to reach a given work rate.

The conditions for carrying out the epoxidation reaction in the presence of the catalysts according to the present invention broadly comprise those already described in the prior art. This applies, for example, to suitable temperatures, pressures, residence times, diluent materials such as nitrogen, carbon dioxide, steam, argon, methane or other saturated hydrocarbons, to the presence of moderating agents to control the catalytic action, for example, 1,2-dichloroethane, vinyl chloride, ethyl chloride or chlorinated polyphenyl compounds, to the desirability of employing recycle operations or applying successive conversions in different reactors to increase the yields of ethylene oxide, and to any other special conditions which may be selected in processes for preparing ethylene oxide. Pressures in the range of from atmospheric to 3450 kPa gauge (500 psig) are generally employed. Higher pressures, however, are not excluded. The molecular oxygen employed as reactant can be obtained from any suitable source including conventional sources. A suitable oxygen charge can include relatively pure oxygen, or a concentrated oxygen stream comprising oxygen in major amount with lesser amounts of one or more diluents, such as nitrogen and argon, or any other oxygen-containing stream, such as air. The use of the present catalysts in ethylene oxide reactions is in no way limited to the use of specific conditions among those that are known to be effective.

For purposes of illustration only, the following table shows the range of conditions that are often used in current commercial ethylene oxide reactor units.

Table I

*GHSV	1500-10,000
Inlet Pressure	1034-2758 kPa gauge (150-400 psig)
Inlet Feed	
Ethylene	1-50%, or 1-40%
Oxygen	3-12%
Carbon dioxide	0-15%
Ethane	0-3%
Argon and/or methane and/or nitrogen	Balance
Diluent chlorohydrocarbon moderator	0.3-20 ppmv total
Coolant temperature	180-315°C
Catalyst temperature	180-325°C
O ₂ conversion level	10-60%
Ethylene Oxide (EO) Production (Work Rate)	32 - 320 kg EO/(m ³ catalyst.hour) (2-20 lbs. EO/cu. ft. catalyst/hr.)

5

* Cubic meters of gas at standard temperature and pressure passing over one cubic meter of packed catalyst per hour (cubic feet of gas at standard temperature and pressure passing over one cubic foot of packed catalyst per hour).

10

In a preferred application, ethylene oxide is produced when an oxygen-containing gas is contacted with ethylene in the presence of the inventive catalysts under suitable epoxidation reaction conditions such as at a temperature in the range of from 180°C to 330°C, and, preferably, 200°C to

15

325°C, and a pressure in the range of from atmospheric to 3450 kPa gauge (500 psig) and, preferably, from 1034 kPa to 2758 kPa gauge (150 psig to 400 psig). In the normal practice of the process for manufacturing ethylene oxide, the feed stream which is contacted with the catalyst, and which comprises ethylene and oxygen, comprises in addition a low concentration of carbon dioxide, because carbon dioxide is a byproduct of the process and appears, in part, in the feed stream as a result of recycling. It is advantageous to reduce in the feed stream the concentration of carbon dioxide to a low level, as this will further enhance the catalyst performance in terms of activity, selectivity and catalyst life. It is preferred that the quantity of carbon dioxide in the feed is at most 4 mole-%, more preferred at most 2 mole-%, in particular at most 1 mole-%, relative to the total feed. Frequently the quantity of carbon dioxide will be at least 0.1 mole-%, more frequently at least 0.5 mole-%, relative to the total feed.

The ethylene oxide produced may be recovered from the reaction mixture by using methods known in the art, for example by absorbing the ethylene oxide from the reactor outlet stream in water and optionally recovering the ethylene oxide from the aqueous solution by distillation.

The ethylene oxide produced in the epoxidation process may be converted into ethylene glycol, an ethylene glycol ether or an alkanolamine.

The conversion into the ethylene glycol or the ethylene glycol ether may comprise, for example, reacting the ethylene oxide with water, suitably using an acidic or a basic catalyst. For example, for making predominantly the ethylene glycol and less ethylene glycol ether, the ethylene oxide may be reacted with a ten fold molar excess of water, in a liquid phase reaction in presence of an acid catalyst, e.g. 0.5-

1.0 %w sulfuric acid, based on the total reaction mixture, at 50-70 °C at 100 kPa absolute, or in a gas phase reaction at 130-240 °C and 2000-4000 kPa absolute, preferably in the absence of a catalyst. If the proportion of water is lowered the proportion of ethylene glycol ethers in the reaction mixture is increased. The ethylene glycol ethers thus produced may be a di-ether, tri-ether, tetra-ether or a subsequent ether. Alternative ethylene glycol ethers may be prepared by converting the ethylene oxide with an alcohol, in particular a primary alcohol, such as methanol or ethanol, by replacing at least a portion of the water by the alcohol.

The conversion into the alkanolamine may comprise reacting ethylene oxide with an amine, such as ammonia, an alkyl amine or a dialkylamine. Anhydrous or aqueous ammonia may be used. Anhydrous ammonia is typically used to favor the production of monoalkanolamine. For methods applicable in the conversion of ethylene oxide into the alkanolamine, reference may be made to, for example US-A-4845296, which is incorporated herein by reference.

Ethylene glycol and ethylene glycol ethers may be used in a large variety of industrial applications, for example in the fields of food, beverages, tobacco, cosmetics, thermoplastic polymers, curable resin systems, detergents, heat transfer systems, etc. Alkanolamines may be used, for example, in the treating ("sweetening") of natural gas.

The following examples are intended to illustrate the advantages of the present invention and are not intended to unduly limit the scope of the invention.

Example I

This Example I describes the preparation of a stock silver impregnation solution used for impregnating various support materials as described in the following examples.

In a 5-liter stainless steel beaker 415 grams of reagent grade sodium hydroxide was dissolved in 2340 ml of deionized water. The temperature of the solution was adjusted to 50°C. In a 4-liter stainless steel beaker 1699 grams of silver
5 nitrate was dissolved in 2100 ml of deionized water. The temperature of the solution was adjusted to 50°C. The sodium hydroxide solution was slowly added to the silver nitrate solution with stirring while the temperature was maintained at 50°C. The resulting slurry was stirred for 15 minutes.
10 The pH of the solution was maintained at above 10 by the addition of NaOH solution as required. A washing procedure was used which included removing liquid by the use of a filter wand followed by the replacement of the removed liquid with an equivalent volume of deionized water. This washing
15 procedure was repeated until the conductivity of the filtrate dropped below 90 micro-mho/cm. After the completion of the last wash cycle, 1500 ml of deionized water was added and followed by the addition of 630 grams of oxalic acid dihydrate (4.997 moles) in increments of 100 grams while
20 stirring and maintaining the solution at 40°C (\pm 5°C). The pH of the solution was monitored during the addition of the last 130 grams of oxalic acid dihydrate to ensure that it did not drop below 7.8 for an extended period of time. Water was removed from the solution with a filter wand and the slurry
25 was cooled to less than 30°C. Slowly added to the solution was 732 grams of 92% ethylenediamine (EDA). The temperature was maintained below 30°C during this addition. A spatula was used to manually stir the mixture until enough liquid was present to mechanically stir. The final solution was used as
30 a stock silver impregnation solution for preparing the catalysts of Example III.

Example II

This Example II presents information concerning the properties and geometric configuration of the four carriers (i.e., Carrier A, Carrier B, Carrier C, and Carrier D) used in the preparation of the catalysts as described in Example III. Presented in the following Table II are certain properties of each of the carriers.

Table II. Properties of Carriers

	Carrier A	Carrier B	Carrier C	Carrier D
<u>Properties</u>				
Water Absorption, %	39.2	45.6	46.5	50.4
Bulk Packing Density, kg/m ³ (lbs/ft ³)	805 (50.3)	728 (45.5)	843 (52.7)	788 (49.2)
ASTM Attrition Loss, %	10.8	14.6	14.7	16.5
Average Flat Plate Crush Strength, N (lbf)	127 (28.6)	95 (21.4)	130 (29.3)	180 (40.4)
Surface Area, m ² /g	0.80	0.78	0.77	0.78
<u>Geometric Configuration</u>				
Nominal Size, mm	8	8	8	8
Average Length, mm	8.1	8.1	7.7	7.7
Length, Range, mm		7.6-8.8	6.6-8.6	6.6-8.6
Diameter, mm	8.5	8.5	8.6	8.6
Bore Diameter, mm	3.8	3.8	1.02	1.02
Ratio Length/Outside Diameter	approx. 1	0.95	0.90	0.90

Each carrier presented in the above Table II had a nominal size of 8 mm and a hollow cylinder geometric configuration. The bore diameter of both Carrier A and Carrier B was 3.8 mm, while the bore diameter of Carriers C and D was only 1 mm. The water pore volumes of Carriers B, C, and D were significantly greater than the water pore volume of Carrier A. This explains the reduction in crush strength and packing density of Carrier B relative to Carrier A; however, with the reduction of the bore diameter of Carriers C and D relative to both Carrier A and Carrier B, the crush strength and packing density are improved such that these properties have values that exceed such values for Carrier A. Carrier D is an example of further improvement over Carrier C, with increased pore volume for the small bore diameter type carrier. This allows for significantly higher silver loadings on the finished catalyst, especially when multiple impregnation techniques are employed in the catalyst preparation.

Example III

This Example III describes the preparation of the comparison catalyst and the inventive catalysts and certain of their physical properties.

Catalyst A (for comparison):

The impregnation solution for preparing Catalyst A was made by mixing 153 grams of silver stock solution of specific gravity 1.5673 g/ml with a solution of 0.1235 g of NH_4ReO_4 in 2 g of 1:1 EDA/ H_2O , 0.0574 g of ammonium metatungstate dissolved in 2 g of 1:1 ammonia/ water and 0.3174 g LiNO_3 dissolved in water. Additional water was added to adjust the specific gravity of the solution to 1.465 g/ml. 50 grams of such doped solution was mixed with 0.1016 g of 50% CsOH solution. This final impregnation solution was used to prepare Catalyst A. 30 grams of Carrier A was evacuated to

20 mm Hg for 1 minute and the final impregnation solution was added to Carrier A while under vacuum, then the vacuum was released and the carrier allowed to contact the liquid for 3 minutes. The impregnated Carrier A was then centrifuged at 500 rpm for 2 minutes to remove excess liquid. Subsequently, impregnated Carrier A was placed in a vibrating shaker and dried in flowing air at 250°C for 5 1/2 minutes. The final Catalyst A composition was 13.2% Ag, 460 ppm Cs/g catalyst, 1.5 μ mole Re/g catalyst, 0.75 μ mole W/g catalyst, and 15 μ mole Li/g catalyst.

Catalyst B (for comparison):

The impregnation solution for preparing Catalyst B was made by mixing 153 grams of silver stock solution of specific gravity 1.589 g/ml with a solution of 0.1051 g of NH_4ReO_4 in 2 g of 1:1 EDA/ H_2O , 0.0488 g of ammonium metatungstate dissolved in 2 g of 1:1 ammonia/ water and 0.270 g LiNO_3 dissolved in water. Additional water was added to adjust the specific gravity of the solution to 1.588 g/ml. 50 grams of such doped solution was mixed with 0.0940 g of 50% CsOH solution. This final impregnation solution was used to prepare Catalyst B. 30 grams of Carrier B was evacuated to 20 mm Hg for 1 minute and the final impregnation solution was added to Carrier B while under vacuum, then the vacuum was released and the carrier allowed to contact the liquid for 3 minutes. The impregnated Carrier B was then centrifuged at 500 rpm for 2 minutes to remove excess liquid. Subsequently, impregnated Carrier B was placed in a vibrating shaker and dried in flowing air at 250°C for 5 1/2 minutes. The final Catalyst B composition was 17.5% Ag, 500 ppm Cs/g catalyst, 1.5 μ mole Re/g catalyst, 0.75 μ mole W/g catalyst, and 15 μ mole Li/g catalyst.

Catalyst C (according to the invention):

The impregnation solution for preparing Catalyst C was

made by mixing 204 grams of silver stock solution of specific gravity 1.573 g/ml with a solution of 0.1378 g of NH_4ReO_4 in 2 g of 1:1 EDA/ H_2O , 0.064 g of ammonium metatungstate dissolved in 2 g of 1:1 ammonia/ water and 0.3542 g LiNO_3 dissolved in water. Additional water was added to adjust the specific gravity of the solution to 1.558 g/ml. 50 grams of such doped solution was mixed with 0.0850 g of 50% CsOH solution. This final impregnation solution was used to prepare Catalyst C. 30 grams of Carrier C was evacuated to 20 mm Hg for 1 minute and the final impregnation solution was added to Carrier C while under vacuum, then the vacuum was released and the carrier allowed to contact the liquid for 3 minutes. The impregnated Carrier C was then centrifuged at 500 rpm for 2 minutes to remove excess liquid. Subsequently, impregnated Carrier C was placed in a vibrating shaker and dried in flowing air at 250°C for 7 minutes. The final Catalyst C composition was 17.8% Ag, 460 ppm Cs/g catalyst, 1.5 μmole Re/g catalyst, 0.75 μmole W/g catalyst, and 15 μmole Li/g catalyst.

Catalyst D (according to the invention):

Catalyst D was prepared in two impregnation steps: the first step involving impregnation with silver, without dopants, the second step involving impregnation with silver and the dopants. Approximately 120 grams of Carrier C was first impregnated with 204 grams of silver solution having a specific gravity of 1.53 g/ml according to the procedure for catalyst C, except that no dopants were added to the silver solution. The resulting dried catalyst precursor contained approximately 17 wt% silver. The dried Catalyst D Precursor was then impregnated with a second solution which was made by mixing 191.0 grams of silver stock solution of specific gravity 1.53 g/ml with a solution of 0.2915 g of NH_4ReO_4 in 2 g of 1:1 EDA/ H_2O , 0.0678 g of ammonium metatungstate

dissolved in 2 g of 1:1 ammonia/water and 0.3747 g LiNO_3 dissolved in water. Additional water was added to adjust the specific gravity of the solution to 1.48 g/ml. 50 grams of such doped solution was mixed with 0.1397 g of 45.4 wt% CsOH solution. This final impregnation solution was used to prepare Catalyst D. A flask containing 30 grams of the Catalyst D Precursor was evacuated to 20 mm Hg for 1 minute and the final impregnation solution was added while under vacuum, then the vacuum was released and the precursor allowed to contact the liquid for 3 minutes. The impregnated precursor was then centrifuged at 500 rpm for 2 minutes to remove excess liquid. Subsequently, Catalyst D was placed in a vibrating shaker and dried in air flowing at a rate of 217 Nl/min (460 SCFH) at 250°C for 7 minutes. The final Catalyst D composition was 27.3% Ag, 550 ppm Cs/g catalyst, 2.4 μmole Re/g catalyst, 0.60 μmole W/g catalyst, and 12 μmole Li/g catalyst.

Catalyst E (according to the invention):

Catalyst E was prepared in two impregnation steps: the first step involving impregnation with silver and a tungsten dopant, the second step involving impregnation with silver and the other dopants. Ammonium metatungstate (0.0639 g) was first dissolved in 1 gram of 33 wt% ethylenediamine/water mixture. This solution was added to 200 grams of a silver solution prepared according to the procedure in Example 1, and having a specific gravity of 1.523 g/ml. Carrier C was impregnated with this silver solution, then centrifuged and dried according to the procedure for catalyst C. The resulting dried Catalyst E Precursor contained approximately 16.6 wt% silver. This dried Catalyst E Precursor was then impregnated with a second solution which was made by mixing 200 grams of silver stock solution of specific gravity 1.523 g/ml with a solution of 0.2906 g of NH_4ReO_4 in 1 g of 1:1

EDA/H₂O, and 0.3735 g LiNO₃ dissolved in 1 gram water. Additional water was added to adjust the specific gravity of the solution to 1.49 g/ml. 50 grams of such doped solution was mixed with 0.1416 g of 44.6 wt% CsOH solution. This final impregnation solution was used to prepare Catalyst E. A flask containing 30 grams of the Catalyst E Precursor was evacuated to 20 mm Hg for 1 minute and the final impregnation solution was added to the Catalyst E Precursor while under vacuum, then the vacuum was released and the Precursor allowed to contact the liquid for 3 minutes. The impregnated Catalyst E Precursor was then centrifuged at 500 rpm for 2 minutes to remove excess liquid, and subsequently placed in a vibrating shaker and dried in air flowing at a rate of 460 SCFH at 250°C for 7 minutes. The final Catalyst E composition was 27.3% Ag, 560 ppm Cs/g catalyst, 2.4 μmole Re/g catalyst, 0.60 μmole W/g catalyst, and 12 μmole Li/g catalyst.

Presented in Table III are the silver loadings of each of the catalysts. It is noted that the silver component of the inventive catalysts B and C was incorporated into the support material by single impregnation methods. Catalyst B includes a significantly higher amount of silver than does Catalyst A. This is thought to be due to the higher water absorption of Carrier B as compared to Carrier A. As for Catalyst C, while it contains close to the same weight percent silver as does Catalyst B, a greater total amount of silver is able to be loaded into a given reactor volume with Catalyst C as opposed to Catalyst A or Catalyst B due to the modified geometry. Catalysts D and E illustrate the loadings achievable with multiple impregnation methods on Carrier C. These examples represent double impregnation results, and it is understood that more impregnations would result in yet higher silver levels. It is also understood that employing a

carrier such as Carrier D would result in yet higher silver levels.

Table III. Silver Content of Catalyst Systems

	Weight % Silver in Catalyst	Silver Loading in 39 mm Packed Bed, kg/m ³
Catalyst A *)	13.2	116
Catalyst B *)	17.5	146
Catalyst C **)	17.8	173
Catalyst D **)	27.3	300
Catalyst E **)	27.3	300
*) for comparison		
**) according to the invention		

Table III also presents the silver loadings of packed catalyst beds which can be achieved when packing the Catalysts A, B, C, D and E in a 39-mm tubular reactor, which is a typical size for use in conjunction with catalysts on a support material of this size. It can be seen that, advantageously, the silver loading in the packed catalyst bed (and in a commercial reactor the amounts of silver packed per unit reactor volume) will be higher as the silver content of the catalyst and the packing density of the catalyst is higher.

Example IV

This Example IV describes the procedure for testing certain of the catalytic properties, such as, selectivity and activity, of the catalysts described in Example III.

Catalysts A, B, C, D, and E were tested for their ability to produce ethylene oxide from a feed containing ethylene and oxygen. To do this, 4 to 5.3 g of crushed catalyst was loaded into a 6.4 mm (1/4 inch) stainless steel U-shaped reactor tube. The tube was immersed in a molten

metal bath (heat medium) and the ends were connected to a gas flow system. The weight of catalyst used and the inlet gas flow rate were adjusted to give a gas hourly space velocity of 3300 NL/(1.h), as calculated for uncrushed catalyst. As for the uncrushed catalysts the catalyst packing density and silver loading changes, the amount of crushed catalyst loaded in the test reactor was changed to reflect different amounts of silver packed per unit reactor volume when using the uncrushed catalysts in a commercial reactor. The catalyst loadings were as follows: Catalyst A (comparative) 4.2 grams, Catalyst B (comparative) 4.01 g, Catalyst C (invention) 4.66 g, Catalyst D (invention) 5.29 g, and Catalyst E (invention) 5.29 g. The gas flow was 16.9 NL/h. The inlet gas pressure was 1550 kPa. The catalysts were treated with nitrogen at 225°C for 2 hours prior to testing. The testing gas mixture passed through the catalyst bed, in a "once-through" operation, consisted of 30 %v ethylene, 8 %v oxygen, 5 %v carbon dioxide, 57 %v nitrogen and 1.5 to 6.0 parts by million by volume (ppmv) ethyl chloride. The temperature was adjusted such that the ethylene oxide concentration in the reactor outlet was 3.1 mole-%. Ethyl chloride concentration was adjusted to obtain maximum selectivity.

The initial performance, i.e. selectivity and activity, of the catalysts is reported in Table IV. The initial performance reflects the performance level of the catalyst as it lined out during the initial two-weeks of testing. The activity as specified reflects the temperature at which the concentration of ethylene oxide in the reactor outlet is 3.1 mole-%. A lower temperature is indicative of a higher activity.

In the testing of Catalysts A, C, D and E the activity and selectivity were also measured upon continued operation.

The results obtained after a cumulative production of ethylene oxide of 0.6 kton/m³ and 1.4 kton/m³ of catalyst are also reported in Table IV.

Table IV. Catalytic Performance of Catalysts

	Selectivity Percent (%)	Activity Temp (°C)
Catalyst A *), initially	88.0	262
at 0.6 kton/m ³	88.5	275
at 1.4 kton/m ³	73.0	300
Catalyst B *), initially	89.1	263
Catalyst C **)	89.4	254
at 0.6 kton/m ³	87.0	270
at 1.4 kton/m ³	79.5	285
Catalyst D **), initially	89.0	246
at 0.6 kton/m ³	88.0	264
at 1.4 kton/m ³	81.0	278
Catalyst E **), initially	87.5	248
at 0.6 kton/m ³	87.0	254
at 1.4 kton/m ³	79.5	268
*) for comparison		
**) according to the invention		

As can be seen from the catalyst performance data presented in Table IV, Catalyst C demonstrates a substantial improvement in initial selectivity relative to Catalyst A and Catalyst B. Catalyst C also demonstrates a substantially greater initial activity than both Catalyst A and Catalyst B by requiring a significantly lower reaction temperature that gives a significantly greater selectivity. It is believed that the improved initial performance of Catalyst C over that of both Catalyst A and Catalyst B is attributable to the greater amount of silver that can be packed into a reactor

due to the high silver loading achievable with the catalyst having a higher water absorption. The improved activity is believed to result from the use of a support material having a hollow cylinder geometric configuration with a small bore diameter in the manufacture of the catalyst.

It is further shown that the concept of higher silver in the specific support geometries can be extended to multiple impregnation methods of catalyst preparation. Catalyst D clearly illustrates the initial selectivity and activity advantage over Catalyst A, and an activity advantage over Catalysts A, B, and C. Also, Catalyst E has a markedly improved initial activity over Catalysts A, B, and C. Both multiple impregnation examples show particularly well the performance improvement as a result of the additional silver loading in an equal reactor volume. Catalyst E illustrates how the advantage in activity can be maintained with respectable selectivity when the dopant addition is sequenced between two impregnation steps.

The performance data obtained for the Catalysts A, C, D and E upon continued operation indicate that Catalyst E provides a further advantage with respect to stability over Catalyst D. The improvement in activity stability is evident from the data in Table IV.

While this invention has been described in terms of the presently preferred embodiment, reasonable variations and modifications are possible by those skilled in the art. Such variations and modifications are within the scope of the described invention and the appended claims.

C L A I M S

1. A catalyst, which catalyst comprises silver deposited on a shaped support material having a hollow cylinder geometric configuration such that the length-to-outside diameter ratio of said shaped support material is in the range of from 0.3 to 2 and the internal diameter is in the range upwardly to 30 percent of the outside diameter of said shaped support material.
2. A catalyst as claimed in claim 1, wherein silver is present in a quantity in the range exceeding 15 weight percent of the total weight of the catalyst.
3. A catalyst as claimed in claim 2, wherein silver is present in a quantity in the range of exceeding 20 weight percent to and at most 50 weight percent, of the total weight of the catalyst.
4. A catalyst as claimed in any of claims 1-3, wherein the support material has a water absorption exceeding 40%.
5. A catalyst as recited in any of claims 1-4, wherein the support material has a surface area in the range of from 0.03 m²/g to 10 m²/g.
6. A catalyst as recited in any of claims 1-5, wherein the support material has a water absorption in the range of from 42.5% to 80%, and a surface area in the range of from 0.5 m²/g to 5 m²/g.
7. A catalyst as claimed in any of claims 1-6, wherein the length-to-outside diameter ratio is in the range of from 0.5 to 1.6 and the ratio of internal diameter to outside diameter is in the range of from 0.01 to 0.25.
8. A catalyst as claimed in claim 7, wherein the length-to-outside diameter ratio is in the range of from 0.9 to 1.1 and the ratio of internal diameter to outside diameter is in the range of from 0.02 to 0.2.

9. A catalyst as claimed in any of claims 1-8, wherein the outside diameter is in the range of from 4 to 16 mm, and the bore diameter is smaller than 3.5 mm.
10. A catalyst as claimed in any of claims 1-9, wherein the outside diameter is in the range of from 5 to 12 mm, and the bore diameter is in the range of from 0.1 to 3 mm.
11. A catalyst as claimed in any of claims 1-10, wherein the bore diameter is in the range of from 0.2 mm to 2 mm.
12. A catalyst as claimed in any of claims 1-11, wherein the catalyst further comprises a promoter component comprising a rare earth metal, magnesium, rhenium, or an alkali metal.
13. A catalyst as claimed in any of claims 1-12, wherein the catalyst further comprises a promoter component comprising rhenium, an alkali metal selected from lithium, potassium, rubidium and cesium, and, in addition, a rhenium copromoter comprising sulfur, molybdenum, tungsten or chromium.
14. A method, comprising:
- providing a shaped support material having a geometric configuration such that the length-to-outside diameter ratio is in the range of from 0.3 to 2 and the internal diameter is in the range upwardly to 30 percent of the outside diameter of said shaped catalyst support; and
- depositing silver on the shaped support.
15. A method as claimed in claim 14, comprising depositing on the support, in addition to silver, a promoter component comprising rhenium, and a rhenium copromoter comprising sulfur, molybdenum, tungsten or chromium, wherein the rhenium copromoter is deposit prior to or simultaneous with the deposition of silver, and rhenium is deposited after at least a portion of the silver has been deposited.
16. A packed catalyst bed, which packed catalyst bed is formed from catalyst particles comprising silver supported on

a shaped support, which catalyst bed has a silver loading of at least 150 kg silver/m³ catalyst bed.

17. A packed catalyst bed as claimed in claim 16, wherein the silver loading is in the range of from 170 to 800 kg silver/m³ catalyst bed.

18. A packed catalyst bed as claimed in claim 17, wherein the silver loading is in the range of from 200 to 600 kg silver/m³ catalyst bed.

19. A process for manufacturing ethylene oxide, which process comprises:
contacting, under suitable epoxidation process conditions, a feed stream, comprising ethylene and oxygen, with the catalyst of any of claims 1-13, or with the catalyst bed of any of claims 16-18.

20. A process as claimed in claim 19, wherein the feed stream which is contacted with the catalyst, and which comprises ethylene and oxygen, has a concentration of carbon dioxide of at most 4 mole-%, in particular at most 2 mole-%, more in particular at most 1 mole-%, relative to the total feed.

21. A method of using ethylene oxide for making ethylene glycol, an ethylene glycol ether or an 1,2-alkanolamine comprising converting ethylene oxide into ethylene glycol, the ethylene glycol ether, or the 1,2-alkanolamine, wherein the ethylene oxide has been obtained by the process for preparing ethylene oxide as claimed in claim 19 or 20.

FIG. 1



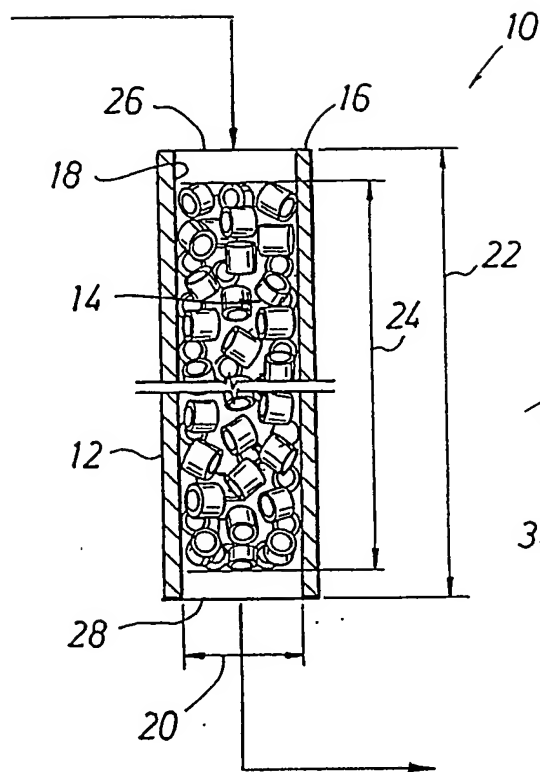


FIG. 2

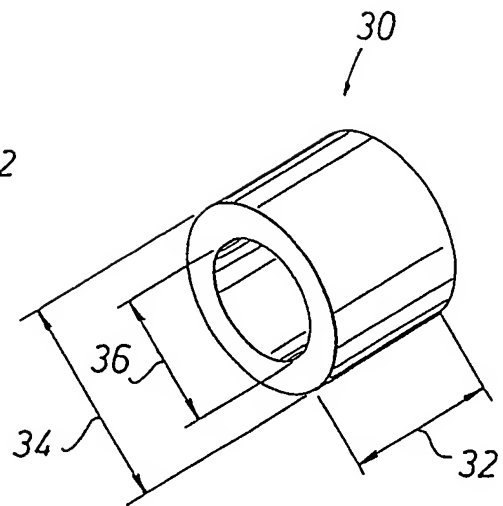


2/2

Fig. 3

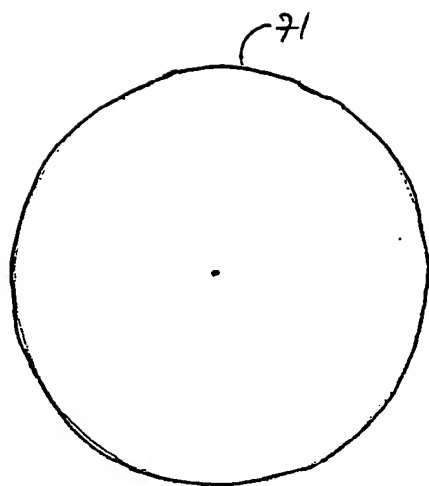

(a)

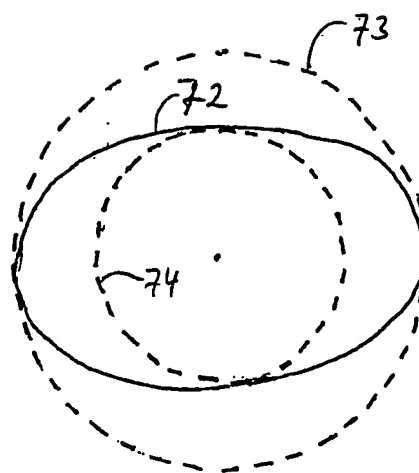

(b)

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01J23/50 B01J23/58 B01J23/63 B01J23/656 B01J23/68
B01J35/02 B01J35/10 C07D301/00 B01J37/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J C07D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 837 194 A (HAYDEN PERCY) 6 June 1989 (1989-06-06) column 1, line 50 - column 5, line 22; claims; examples; tables	1-21
Y	EP 1 201 301 A (MITSUBISHI CHEM CORP) 2 May 2002 (2002-05-02) page 2, line 50 - page 6, line 5; claims; examples; tables	1-21
Y	EP 0 327 356 A (CHINA PETROCHEMICAL CORP ; BEIJING RES INST YANSHAN PETRO (CN)) 9 August 1989 (1989-08-09) page 2, line 3 - page 4, line 45; claims; examples; tables	1-21
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

11 August 2004

Date of mailing of the international search report

23/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

de Cauwer, R

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 02/26370 A (BOS ALOUISIUS NICOLAAS RENE ; SLAPAK MATHIAS JOZEF PAUL (NL); SHELL IN) 4 April 2002 (2002-04-04) page 13, line 28 - page 14, line 8; claims; examples; tables -----	1-21
Y	US 6 511 938 B1 (LIU ALBERT CHENG-YU ET AL) 28 January 2003 (2003-01-28) column 7, line 10 - column 24, line 12; claims; examples -----	1-21
Y	EP 0 266 015 A (SHELL INT RESEARCH) 4 May 1988 (1988-05-04) page 3, line 37 - page 12, line 45; claims; examples; tables -----	1-21
Y	GB 1 489 335 A (SHELL INT RESEARCH) 19 October 1977 (1977-10-19) page 2, line 18 - page 6, line 55; claims; examples; tables -----	1-21

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4837194	A	06-06-1989	CA 1269362 A1	22-05-1990
			DE 3669668 D1	26-04-1990
			EP 0211521 A1	25-02-1987
			IN 173933 A1	13-08-1994
			JP 62042743 A	24-02-1987
			ZA 8605131 A	25-03-1987
			AU 594465 B2	08-03-1990
			AU 7348787 A	10-12-1987
			CA 1300118 C	05-05-1992
			DE 3775622 D1	13-02-1992
			EP 0248579 A1	09-12-1987
			JP 2563339 B2	11-12-1996
			JP 63001447 A	06-01-1988
			NZ 220436 A	29-08-1989
			SG 104892 G	24-12-1992
			US 4810689 A	07-03-1989
EP 1201301	A	02-05-2002	JP 2002126526 A	08-05-2002
			JP 2002126527 A	08-05-2002
			EP 1201301 A1	02-05-2002
			US 2002091291 A1	11-07-2002
EP 0327356	A	09-08-1989	CN 1034678 A	16-08-1989
			DE 68921777 D1	27-04-1995
			DE 68921777 T2	23-11-1995
			EP 0327356 A1	09-08-1989
			IN 171804 A1	09-01-1993
			JP 1941314 C	23-06-1995
			JP 2056246 A	26-02-1990
			JP 6067475 B	31-08-1994
			US 5063195 A	05-11-1991
WO 0226370	A	04-04-2002	AU 1590602 A	08-04-2002
			WO 0226370 A1	04-04-2002
			EP 1326706 A1	16-07-2003
			JP 2004509738 T	02-04-2004
			US 2004096378 A1	20-05-2004
US 6511938	B1	28-01-2003	AT 170425 T	15-09-1998
			AU 656537 B2	09-02-1995
			AU 8576191 A	30-04-1992
			CA 2053411 A1	13-04-1992
			DE 69130098 D1	08-10-1998
			DE 69130098 T2	01-04-1999
			DK 480538 T3	02-11-1998
			EP 0480538 A1	15-04-1992
			ES 2120412 T3	01-11-1998
			JP 5305237 A	19-11-1993
			JP 2720124 B2	25-02-1998
			JP 4305246 A	28-10-1992
			KR 147853 B1	17-08-1998
EP 0266015	A	04-05-1988	US 4766105 A	23-08-1988
			US 4761394 A	02-08-1988
			AT 69977 T	15-12-1991
			AU 592478 B2	11-01-1990
			AU 8053987 A	05-05-1988
			BG 60854 B1	31-05-1996

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 0266015	A	BR 8705810 A	31-05-1988	
		CA 1304346 C	30-06-1992	
		CN 87107194 A ,B	27-07-1988	
		CS 8806977 A2	12-09-1990	
		CS 8707729 A2	13-06-1990	
		DE 3774999 D1	16-01-1992	
		DK 560087 A	01-05-1988	
		EG 18719 A	30-12-1993	
		EP 0266015 A1	04-05-1988	
		ES 2028860 T3	16-07-1992	
		FI 874786 A ,B,	01-05-1988	
		GR 3003662 T3	16-03-1993	
		HU 47046 A2	30-01-1989	
		IE 60557 B1	27-07-1994	
		IL 84232 A	21-06-1992	
		IN 169589 A1	16-11-1991	
		JP 2619660 B2	11-06-1997	
		JP 63126552 A	30-05-1988	
		KR 9611047 B1	16-08-1996	
		MA 21096 A1	01-07-1988	
		MX 170627 B	31-08-1993	
		NO 874528 A ,B,	02-05-1988	
		NZ 222342 A	27-09-1989	
		PH 25304 A	30-04-1991	
		PL 268522 A1	08-12-1988	
		PT 86038 A ,B	01-11-1987	
		RO 100109 A2	02-12-1991	
		SG 126392 G	19-02-1993	
		SU 1831369 A3	30-07-1993	
		TR 26675 A	05-07-1994	
		US 4820675 A	11-04-1989	
		US 4808738 A	28-02-1989	
		YU 180088 A1	28-02-1990	
		YU 197887 A1	31-12-1988	
		ZA 8708013 A	29-06-1988	
		DD 267435 A5	03-05-1989	
		HU 202132 B	28-02-1991	
		US 4833261 A	23-05-1989	
GB 1489335	A	19-10-1977	BE 821439 A1	24-04-1975
			CA 1048010 A1	06-02-1979
			CS 219313 B2	25-03-1983
			DD 114407 A5	05-08-1975
			DE 2448449 A1	30-04-1975
			ES 431308 A1	16-11-1976
			ES 447632 A1	16-06-1977
			FR 2249087 A1	23-05-1975
			IN 143563 A1	24-12-1977
			IN 143192 A1	15-10-1977
			IT 1025175 B	10-08-1978
			JP 1223773 C	15-08-1984
			JP 50074589 A	19-06-1975
			JP 58001629 B	12-01-1983
			NL 7413748 A	29-04-1975
			PL 99702 B1	31-08-1978
			RO 84369 A1	21-06-1984
			SE 407156 B	19-03-1979
			SE 7412461 A	28-04-1975

